


Spiralbohrer AO Schnellkupplung

Twist Drill AO quick coupling

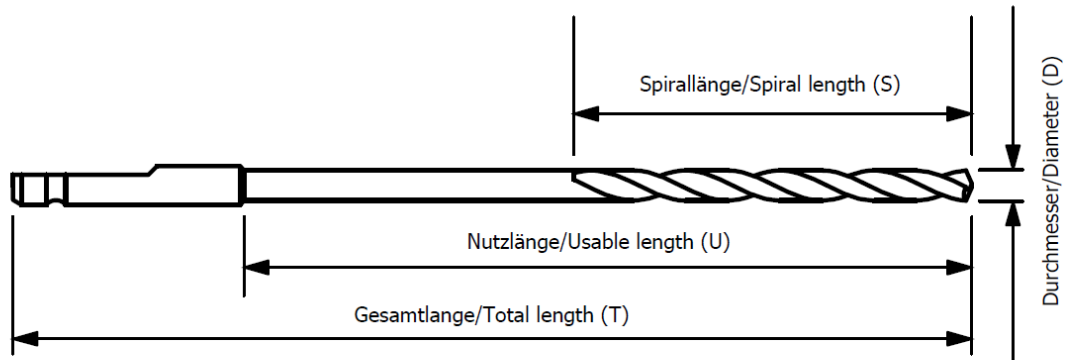

Ref. No	D	S	T
AO 15-70	1,5mm	32	85,0mm
AO 15110	1,5mm	32	110,0mm
AO 2010	2,0mm	50	100,0mm
AO 25110	2,5mm	50	110,0mm
AO 25175	2,5mm	50	130,0mm
AO 27110	2,7mm	50	110,0mm
AO 27125	2,7mm	50	125,0mm
AO 30145	3,0mm	50	145,0mm
AO 32145	3,2mm	50	145,0mm
A= 32195	3,2mm	50	195,0mm
AO 35100	3,5mm	50	110,0mm
AO 35245	3,5mm	50	145,0mm
AO 40145	4,0mm	50	145,0mm
AO 45145	4,5mm	50	145,0mm
AO 45195	4,5mm	50	195,0mm
AO 50145	5,0mm	50	145,0mm
AO 60145	6,0mm	50	145,0mm

Rostfreier Stahl – gehärtet 44HRC – nicht steril

Stainless steel - hardened 44 HRC – non steril